


ACTUAL SIZE



## Micro Regulator - M5 Ports

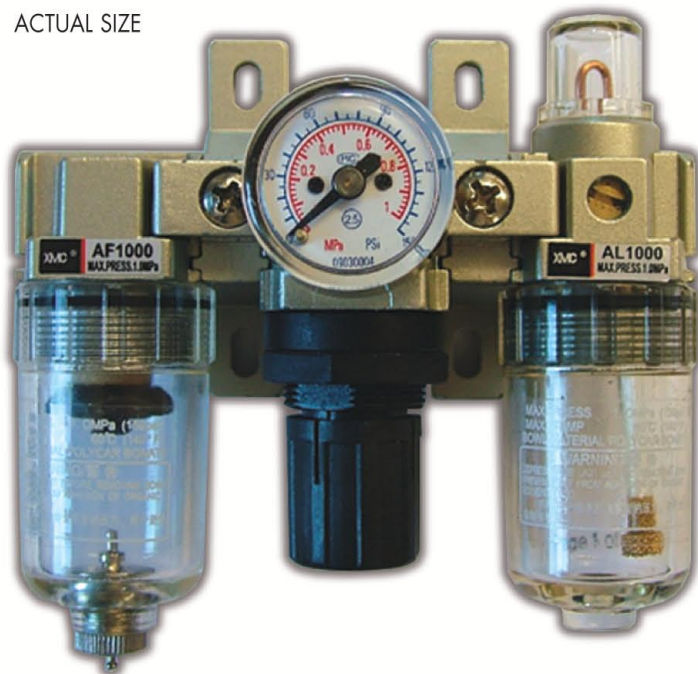

Max pressure	10 bar
Range	0.5 - 8 Bar
Ambient and Fluid temperature	5 - 60°C

Order Code	<b>€</b>
<b>M-AR1000-M5</b>	<b>14.70</b>

## Micro Filter - M5 Ports



Max pressure	10 bar
Ambient and Fluid temperature	5 - 60°C
Filtration	25µm
Container Material	Polycarbonate

Order Code	<b>€</b>
<b>M-AF1000-M5</b>	<b>14.30</b>

## Micro Lubricator - M5 Ports



Max pressure	10 bar
Ambient and Fluid temperature	5 - 60°C
Recommended Oil use	Turbine No.1 Oil ISOVG32
Container Material	Polycarbonate

Order Code	<b>€</b>
<b>M-AL1000-M5</b>	<b>10.26</b>

## Micro Filter + Regulator + Lubricator Set - M5 Ports



Max pressure	10 bar
Ambient and Fluid temperature	5 - 60°C
Filtration	25µm
Recommended Oil use	Turbine No.1 Oil ISOVG32
Container Material	Polycarbonate
Range	0.5 - 8 Bar

Order Code	<b>€</b>
<b>M-AC1000-M5</b>	<b>40.47</b>

## Micro Filter Regulator - M5 Ports



Max pressure	10 bar
Ambient and Fluid temperature	5 - 60°C
Filtration	25µm
Container material	Polycarbonate
Range	0.5 - 8 Bar

Order Code	<b>€</b>
<b>M-AW1000-M5</b>	<b>24.27</b>

## Micro Filter Regulator + Lubricator Set



Max pressure	10 bar
Ambient and Fluid temperature	5 - 60°C
Filtration	25µm
Recommended Oil use	Turbine No.1 Oil ISOVG32
Container Material	Polycarbonate
Range	0.5 - 8 Bar

Order Code	<b>€</b>
<b>M-AC1010-M5</b>	<b>36.23</b>

## Pressure Gauge 27mm to suit Micro FRL



Order Code	Description	<b>€</b>
<b>PG-27-10-R1</b>	0 - 10 bar	<b>3.86</b>

COUPLINGS

HYDRAULICS

PNEUMATICS

BOSCH REXROTH PNEUMATICS

AIR TREATMENT

TUBE FITTINGS

HOSETAILS & ADAPTORS

STAINLESS STEEL

VALVES

TUBING & HOSECLIPS

HOSE REELS, PUMPS & GARAGE EQUIPMENT

AIR, WATER & PAINT GUNS

VACUUM EQUIPMENT

COMPRESSED AIR SYSTEMS

MALLEABLE IRON

TOOLS & MEASURING

AIR TOOLS COMPRESSORS

ENGINEERING MAINTENANCE

PARTS HANDLING & STORAGE

ALUMINIUM PROFILE & ACCESSORIES

SPILL CONTROL